

gadget L

Track spotlight with interchangeable lenses



Gadget L is great for places where quiet and unobtrusive light is needed. Without excessive features Gadget L makes an excellent choice for churches and the like.

The benefits

- Discreet design, fits everywhere
- Best possible color rendering and color consistency
- Comes in three different beam angles

Choose the variant that fits your needs.

	Analog	DMX	DALI	Casambi
Article	AL	AHX	AHD	AHC
Function	Integrated manual dimmer 0-100%	Wireless DMX via Lumenradio	DALI controlled 1-100%	Bluetooth Low Energy protocol
3 Phase Tracks	Fits most known	Fits most known	Global Trac Pulse	Fits most known




Gadget L Specification

Material	Lamp housing made of aluminum Adapter housing made of PBT/PC 10 GF Lens made of Acrylic
Finish	Grey (RAL 7040) Black (RAL 9005) White (RAL 9016) Custom coating upon request
System	3-phase circuit track
Protection class	IP20
Operating voltage	230V~ 50/60Hz
Power consumption	24W
Beam angles	Interchangeable lenses
Color temperatures	2700K, 3000K, 4000K
Swivels	>365°
Tilts	>90°
Weight	740 g (with adapter)
Features	Phase selector, toolless pan and tilt lock



Light Data

LED Lumen	2000 lm
Luminaire Lumen	930 lm
CRI	95 (Typical 98 CRI)
Red component R9	>80
MacAdam	2-step ellipse (SDCM 2)
TM30-18 Rf	93
TM30-18 Rg	100

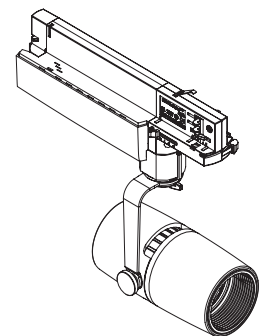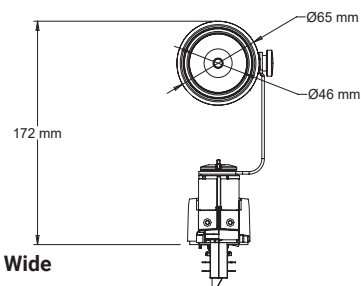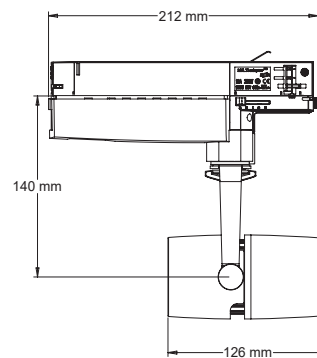

Beam angles

Lens:	Narrow		Medium		Wide		
		13°		18°		27°	
	[m]	∅	Lux	∅	Lux	∅	Lux
	1	0,2	12215	0,3	7050	0,5	2503
	2	0,5	3054	0,6	1763	1	626
	3	0,7	1357	0,9	783	1,5	278

Light data from 3000K

SPOTLIGHTS
GADGET L



GADGET L ANALOG

Built-in local dimmer (0-100%)
Slim profile adapter

2700K	<input type="checkbox"/>	GADL27C-AL-1	Gadget L 230V/24W 2700K, Grey	CRI 95, SDCM2, Lens N, 3-phase, dimmer
	<input type="checkbox"/>	GADL27C-AL-2	Gadget L 230V/24W 2700K, Black	CRI 95, SDCM2, Lens N, 3-phase, dimmer
	<input type="checkbox"/>	GADL27C-AL-3	Gadget L 230V/24W 2700K, White	CRI 95, SDCM2, Lens N, 3-phase, dimmer
3000K	<input type="checkbox"/>	GADL30C-AL-1	Gadget L 230V/24W 3000K, Grey	CRI 95, SDCM2, Lens N, 3-phase, dimmer
	<input type="checkbox"/>	GADL30C-AL-2	Gadget L 230V/24W 3000K, Black	CRI 95, SDCM2, Lens N, 3-phase, dimmer
	<input type="checkbox"/>	GADL30C-AL-3	Gadget L 230V/24W 3000K, White	CRI 95, SDCM2, Lens N, 3-phase, dimmer
4000K	<input type="checkbox"/>	GADL40C-AL-1	Gadget L 230V/24W 4000K, Grey	CRI 95, SDCM2, Lens N, 3-phase, dimmer
	<input type="checkbox"/>	GADL40C-AL-2	Gadget L 230V/24W 4000K, Black	CRI 95, SDCM2, Lens N, 3-phase, dimmer
	<input type="checkbox"/>	GADL40C-AL-3	Gadget L 230V/24W 4000K, White	CRI 95, SDCM2, Lens N, 3-phase, dimmer



GADGET L DMX

Wireless DMX via Lumenradio CRMX
Configuration via built-in display
Fits standard 3-phase track
Local dimmer (0-100%)



2700K	<input type="checkbox"/>	GADL27C-AHX-1	Gadget L 230V/24W DMX 2700K, Grey	CRI 95, SDCM2, Lens N, 3-phase, wireless DMX
	<input type="checkbox"/>	GADL27C-AHX-2	Gadget L 230V/24W DMX 2700K, Black	CRI 95, SDCM2, Lens N, 3-phase, wireless DMX
	<input type="checkbox"/>	GADL27C-AHX-3	Gadget L 230V/24W DMX 2700K, White	CRI 95, SDCM2, Lens N, 3-phase, wireless DMX
3000K	<input type="checkbox"/>	GADL30C-AHX-1	Gadget L 230V/24W DMX 3000K, Grey	CRI 95, SDCM2, Lens N, 3-phase, wireless DMX
	<input type="checkbox"/>	GADL30C-AHX-2	Gadget L 230V/24W DMX 3000K, Black	CRI 95, SDCM2, Lens N, 3-phase, wireless DMX
	<input type="checkbox"/>	GADL30C-AHX-3	Gadget L 230V/24W DMX 3000K, White	CRI 95, SDCM2, Lens N, 3-phase, wireless DMX
4000K	<input type="checkbox"/>	GADL40C-AHX-1	Gadget L 230V/24W DMX 4000K, Grey	CRI 95, SDCM2, Lens N, 3-phase, wireless DMX
	<input type="checkbox"/>	GADL40C-AHX-2	Gadget L 230V/24W DMX 4000K, Black	CRI 95, SDCM2, Lens N, 3-phase, wireless DMX
	<input type="checkbox"/>	GADL40C-AHX-3	Gadget L 230V/24W DMX 4000K, White	CRI 95, SDCM2, Lens N, 3-phase, wireless DMX



GADGET L DALI

DALI (Dimming 1-100%).
Equipped with a DALI driver for Global Trac PULSE track



2700K	<input type="checkbox"/>	GADL27C-AHD-1	Gadget L 230V/24W DALI 2700K, Grey	CRI 95, SDCM2, Lens N, 3-phase, PULSE DALI
	<input type="checkbox"/>	GADL27C-AHD-2	Gadget L 230V/24W DALI 2700K, Black	CRI 95, SDCM2, Lens N, 3-phase, PULSE DALI
	<input type="checkbox"/>	GADL27C-AHD-3	Gadget L 230V/24W DALI 2700K, White	CRI 95, SDCM2, Lens N, 3-phase, PULSE DALI
3000K	<input type="checkbox"/>	GADL30C-AHD-1	Gadget L 230V/24W DALI 3000K, Grey	CRI 95, SDCM2, Lens N, 3-phase, PULSE DALI
	<input type="checkbox"/>	GADL30C-AHD-2	Gadget L 230V/24W DALI 3000K, Black	CRI 95, SDCM2, Lens N, 3-phase, PULSE DALI
	<input type="checkbox"/>	GADL30C-AHD-3	Gadget L 230V/24W DALI 3000K, White	CRI 95, SDCM2, Lens N, 3-phase, PULSE DALI
4000K	<input type="checkbox"/>	GADL40C-AHD-1	Gadget L 230V/24W DALI 4000K, Grey	CRI 95, SDCM2, Lens N, 3-phase, PULSE DALI
	<input type="checkbox"/>	GADL40C-AHD-2	Gadget L 230V/24W DALI 4000K, Black	CRI 95, SDCM2, Lens N, 3-phase, PULSE DALI
	<input type="checkbox"/>	GADL40C-AHD-3	Gadget L 230V/24W DALI 4000K, White	CRI 95, SDCM2, Lens N, 3-phase, PULSE DALI



GADGET L CASAMBI

Fixture is configured using the Casambi app
Fits most known 3-phase tracks

2700K	<input checked="" type="checkbox"/>	GADL27C-AHC-1	Gadget L 230V/24W Casambi 2700K, Grey	CRI 95, SDCM2, Lens N, 3-phase
	<input checked="" type="checkbox"/>	GADL27C-AHC-2	Gadget L 230V/24W Casambi 2700K, Black	CRI 95, SDCM2, Lens N, 3-phase
	<input type="checkbox"/>	GADL27C-AHC-3	Gadget L 230V/24W Casambi 2700K, White	CRI 95, SDCM2, Lens N, 3-phase
3000K	<input checked="" type="checkbox"/>	GADL30C-AHC-1	Gadget L 230V/24W Casambi 3000K, Grey	CRI 95, SDCM2, Lens N, 3-phase
	<input checked="" type="checkbox"/>	GADL30C-AHC-2	Gadget L 230V/24W Casambi 3000K, Black	CRI 95, SDCM2, Lens N, 3-phase
	<input type="checkbox"/>	GADL30C-AHC-3	Gadget L 230V/24W Casambi 3000K, White	CRI 95, SDCM2, Lens N, 3-phase
4000K	<input checked="" type="checkbox"/>	GADL40C-AHC-1	Gadget L 230V/24W Casambi 4000K, Grey	CRI 95, SDCM2, Lens N, 3-phase
	<input checked="" type="checkbox"/>	GADL40C-AHC-2	Gadget L 230V/24W Casambi 4000K, Black	CRI 95, SDCM2, Lens N, 3-phase
	<input type="checkbox"/>	GADL40C-AHC-3	Gadget L 230V/24W Casambi 4000K, White	CRI 95, SDCM2, Lens N, 3-phase



GADGET L CC SOLO

No driver / adapter included
Operated by external LED driver, max 600 mA / 22W, Vf = 36V

2700K	<input checked="" type="checkbox"/>	GADL27C-CCS-1	Gadget L CC/600mA Solo 2700K, Grey	Vf=36V, 600mA, CRI 95, SDCM2, Lens N, 1m cable
	<input checked="" type="checkbox"/>	GADL27C-CCS-2	Gadget L CC/600mA Solo 2700K, Black	Vf=36V, 600mA, CRI 95, SDCM2, Lens N, 1m cable
	<input type="checkbox"/>	GADL27C-CCS-3	Gadget L CC/600mA Solo 2700K, White	Vf=36V, 600mA, CRI 95, SDCM2, Lens N, 1m cable
3000K	<input checked="" type="checkbox"/>	GADL30C-CCS-1	Gadget L CC/600mA Solo 3000K, Grey	Vf=36V, 600mA, CRI 95, SDCM2, Lens N, 1m cable
	<input checked="" type="checkbox"/>	GADL30C-CCS-2	Gadget L CC/600mA Solo 3000K, Black	Vf=36V, 600mA, CRI 95, SDCM2, Lens N, 1m cable
	<input type="checkbox"/>	GADL30C-CCS-3	Gadget L CC/600mA Solo 3000K, White	Vf=36V, 600mA, CRI 95, SDCM2, Lens N, 1m cable
4000K	<input checked="" type="checkbox"/>	GADL40C-CCS-1	Gadget L CC/600mA Solo 4000K, Grey	Vf=36V, 600mA, CRI 95, SDCM2, Lens N, 1m cable
	<input checked="" type="checkbox"/>	GADL40C-CCS-2	Gadget L CC/600mA Solo 4000K, Black	Vf=36V, 600mA, CRI 95, SDCM2, Lens N, 1m cable
	<input type="checkbox"/>	GADL40C-CCS-3	Gadget L CC/600mA Solo 4000K, White	Vf=36V, 600mA, CRI 95, SDCM2, Lens N, 1m cable