

neo Profile Narrow

A bright contour spotlight with advanced zoom lens optics

Variable beam angle 14–27°.

Fits all known 3-phase circuit tracks.



Built in beam shaping shutters provides excellent control.



Description

Neo Profile Narrow is developed for use in museums and art galleries. Every fixture can individually handle all changable variables of the light. With two sliding lenses, you can adjust the size and focus on the light beam.

In addition to the analog and DMX series of Neo, a DALI track version is now available.

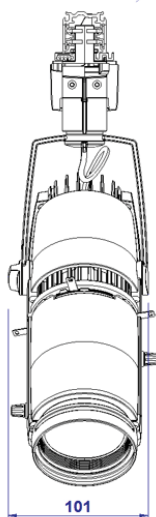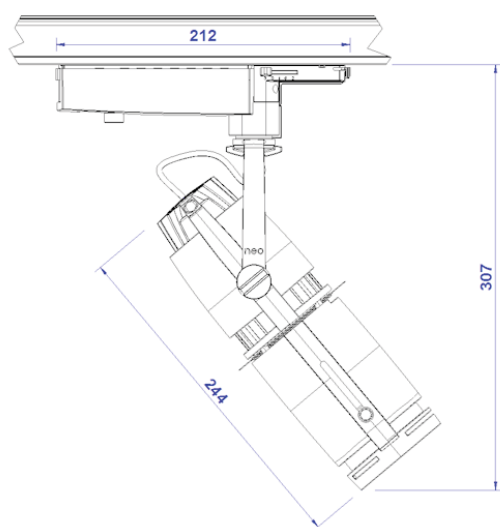

TECHNICAL SPECIFICATION

Material	Lamp housing of die-cast magnesium Adapter housing of PBT/PC 10 GF Anti-reflective zoom lenses
Finish	Grey (RAL 9006) Black (RAL 9005) White (RAL 9016)
System	3-phase circuit track (eg. Global Trac, Erco, Zumtobel, iGuzzini, Eutrac and Hoffmeister)
Dimming control	Integrated manual dimmer 0-100% DMX via Lumenradio DMX DALI-version (only for Global Trac PULSE track system or equivalent) Not compatible with mains dimmer
Protection class	IP20
Operating voltage	230V~ 50/60Hz
Power consumption	27W
CRI	95
Color temperature	2700K/3000K/4000K
Beam angle	Adjustable 14–27°
Swivels	>365°
Tilts	>90°
Gobo	E-size (37,5mm)
Features	Filter holder, phase selector, lockable pan/tilt
Optional accessories	Gobo holder, gobo patterns

NEO PROFILE NARROW ANALOG










Analog version with built in local dimmer (0-100%)

2700K		NEOPN27C-AH-1	Neo Profile Narrow 230V/27W 2700K, Grey	2160lm, CRI 95, 14-27°, 3-phase, dimmer
		NEOPN27C-AH-2	Neo Profile Narrow 230V/27W 2700K, Black	2160lm, CRI 95, 14-27°, 3-phase, dimmer
		NEOPN27C-AH-3	Neo Profile Narrow 230V/27W 2700K, White	2160lm, CRI 95, 14-27°, 3-phase, dimmer
3000K		NEOPN30C-AH-1	Neo Profile Narrow 230V/27W 3000K, Grey	2300lm, CRI 95, 14-27°, 3-phase, dimmer
		NEOPN30C-AH-2	Neo Profile Narrow 230V/27W 3000K, Black	2300lm, CRI 95, 14-27°, 3-phase, dimmer
		NEOPN30C-AH-3	Neo Profile Narrow 230V/27W 3000K, White	2300lm, CRI 95, 14-27°, 3-phase, dimmer
4000K		NEOPN40C-AH-1	Neo Profile Narrow 230V/27W 4000K, Grey	2520lm, CRI 90, 14-27°, 3-phase, dimmer
		NEOPN40C-AH-2	Neo Profile Narrow 230V/27W 4000K, Black	2520lm, CRI 90, 14-27°, 3-phase, dimmer
		NEOPN40C-AH-3	Neo Profile Narrow 230V/27W 4000K, White	2520lm, CRI 90, 14-27°, 3-phase, dimmer

NEO PROFILE NARROW DMX

DMX (Dimming 0-100%) wireless via Lumenradio CRMX.



2700K		NEOPN27C-AHX-1	Neo Profile Narrow 230V/27W DMX 2700K, Grey	2160lm, CRI 95, 14-27°, 3-phase, wireless DMX
		NEOPN27C-AHX-2	Neo Profile Narrow 230V/27W DMX 2700K, Black	2160lm, CRI 95, 14-27°, 3-phase, wireless DMX
		NEOPN27C-AHX-3	Neo Profile Narrow 230V/27W DMX 2700K, White	2160lm, CRI 95, 14-27°, 3-phase, wireless DMX
3000K		NEOPN30C-AHX-1	Neo Profile Narrow 230V/27W DMX 3000K, Grey	2300lm, CRI 95, 14-27°, 3-phase, wireless DMX
		NEOPN30C-AHX-2	Neo Profile Narrow 230V/27W DMX 3000K, Black	2300lm, CRI 95, 14-27°, 3-phase, wireless DMX
		NEOPN30C-AHX-3	Neo Profile Narrow 230V/27W DMX 3000K, White	2300lm, CRI 95, 14-27°, 3-phase, wireless DMX
4000K		NEOPN40C-AHX-1	Neo Profile Narrow 230V/27W DMX 4000K, Grey	2520lm, CRI 90, 14-27°, 3-phase, wireless DMX
		NEOPN40C-AHX-2	Neo Profile Narrow 230V/27W DMX 4000K, Black	2520lm, CRI 90, 14-27°, 3-phase, wireless DMX
		NEOPN40C-AHX-3	Neo Profile Narrow 230V/27W DMX 4000K, White	2520lm, CRI 90, 14-27°, 3-phase, wireless DMX

NEW!

NEO PROFILE NARROW DALI









DALI (Dimming 1-100%). This luminaire is equipped with a DALI driver for PULSE track.



2700K		NEOPN27C-AHD-1	Neo Profile Narrow 230V/27W DALI 2700K, Grey	2160lm, CRI 95, 14-27°, 3-phase, PULSE DALI
		NEOPN27C-AHD-2	Neo Profile Narrow 230V/27W DALI 2700K, Black	2160lm, CRI 95, 14-27°, 3-phase, PULSE DALI
		NEOPN27C-AHD-3	Neo Profile Narrow 230V/27W DALI 2700K, White	2160lm, CRI 95, 14-27°, 3-phase, PULSE DALI
3000K		NEOPN30C-AHD-1	Neo Profile Narrow 230V/27W DALI 3000K, Grey	2300lm, CRI 95, 14-27°, 3-phase, PULSE DALI
		NEOPN30C-AHD-2	Neo Profile Narrow 230V/27W DALI 3000K, Black	2300lm, CRI 95, 14-27°, 3-phase, PULSE DALI
		NEOPN30C-AHD-3	Neo Profile Narrow 230V/27W DALI 3000K, White	2300lm, CRI 95, 14-27°, 3-phase, PULSE DALI
4000K		NEOPN40C-AHD-1	Neo Profile Narrow 230V/27W DALI 4000K, Grey	2520lm, CRI 90, 14-27°, 3-phase, PULSE DALI
		NEOPN40C-AHD-2	Neo Profile Narrow 230V/27W DALI 4000K, Black	2520lm, CRI 90, 14-27°, 3-phase, PULSE DALI
		NEOPN40C-AHD-3	Neo Profile Narrow 230V/27W DALI 4000K, White	2520lm, CRI 90, 14-27°, 3-phase, PULSE DALI

NEO PROFILE NARROW CC

Solo version, without driver.

2700K		NEOPN27C-CCS-1	Neo Profile Narrow CC/700mA Solo 2700K, Grey	2160lm, Vf=36V, CRI 95, 14-27°, 1m cable
		NEOPN27C-CCS-2	Neo Profile Narrow CC/700mA Solo 2700K, Black	2160lm, Vf=36V, CRI 95, 14-27°, 1m cable
		NEOPN27C-CCS-3	Neo Profile Narrow CC/700mA Solo 2700K, White	2160lm, Vf=36V, CRI 95, 14-27°, 1m cable
3000K		NEOPN30C-CCS-1	Neo Profile Narrow CC/700mA Solo 3000K, Grey	2300lm, Vf=36V, CRI 95, 14-27°, 1m cable
		NEOPN30C-CCS-2	Neo Profile Narrow CC/700mA Solo 3000K, Black	2300lm, Vf=36V, CRI 95, 14-27°, 1m cable
		NEOPN30C-CCS-3	Neo Profile Narrow CC/700mA Solo 3000K, White	2300lm, Vf=36V, CRI 95, 14-27°, 1m cable
4000K		NEOPN40C-CCS-1	Neo Profile Narrow CC/700mA Solo 4000K, Grey	2520lm, Vf=36V, CRI 90, 14-27°, 1m cable
		NEOPN40C-CCS-2	Neo Profile Narrow CC/700mA Solo 4000K, Black	2520lm, Vf=36V, CRI 90, 14-27°, 1m cable
		NEOPN40C-CCS-3	Neo Profile Narrow CC/700mA Solo 4000K, White	2520lm, Vf=36V, CRI 90, 14-27°, 1m cable