


gizmo DOWNLIGHT

Downlights based on Gizmo

Comes in two versions.

Standardized cable connector system for easy installation.



**Gizmo Downlight
Fixed**






**Gizmo Downlight
Adjustable**



Description

Downlights can be used to evenly illuminate large areas. Widely used as orientation lighting in museums. As with all other Gizmo, lenses can be interchanged.

Downlight Fixed:

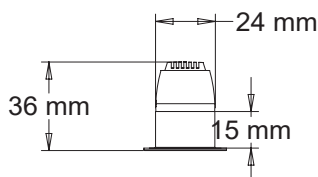

Downlight Adjustable:

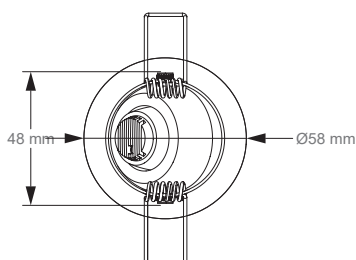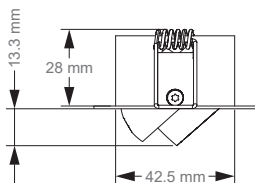

TECHNICAL SPECIFICATION

Material	Machined aluminum Lens of PC
Finish	Black White (Brass)
Dimming control	Via external dimmer
Protection class	IP20
CRI	90
Color temperature	2700K/3000K/4000K
Beam angle	Very Narrow Narrow (standard) Medium Wide Elliptical



GIZMO CC 200LM DOWNLIGHT FIX

Hole size 26mm diameter.

2700K	<input checked="" type="checkbox"/>	GIZ27-CCDL-2	Gizmo CC/700mA Downlight Fix 2700K, Black	180lm, Vf=3V ,CRI 90, lens N, 1m cable
	<input type="checkbox"/>	GIZ27-CCDL-3	Gizmo CC/700mA Downlight Fix 2700K, White	180lm, Vf=3V ,CRI 90, lens N, 1m cable
	<input checked="" type="checkbox"/>	GIZ27-CCDL-M	Gizmo CC/700mA Downlight Fix 2700K, Brass	180lm, Vf=3V ,CRI 90, lens N, 1m cable
3000K	<input checked="" type="checkbox"/>	GIZ30-CCDL-2	Gizmo CC/700mA Downlight Fix 3000K, Black	190lm, Vf=3V ,CRI 90, lens N, 1m cable
	<input type="checkbox"/>	GIZ30-CCDL-3	Gizmo CC/700mA Downlight Fix 3000K, White	190lm, Vf=3V ,CRI 90, lens N, 1m cable
	<input checked="" type="checkbox"/>	GIZ30-CCDL-M	Gizmo CC/700mA Downlight Fix 3000K, Brass	190lm, Vf=3V ,CRI 90, lens N, 1m cable
4000K	<input checked="" type="checkbox"/>	GIZ40-CCDL-2	Gizmo CC/700mA Downlight Fix 4000K, Black	200lm, Vf=3V ,CRI 90, lens N, 1m cable
	<input type="checkbox"/>	GIZ40-CCDL-3	Gizmo CC/700mA Downlight Fix 4000K, White	200lm, Vf=3V ,CRI 90, lens N, 1m cable
	<input checked="" type="checkbox"/>	GIZ40-CCDL-M	Gizmo CC/700mA Downlight Fix 4000K, Brass	200lm, Vf=3V ,CRI 90, lens N, 1m cable

GIZMO CC 200LM DOWNLIGHT ADJUSTABLE

Hole size 48mm diameter.

2700K	<input checked="" type="checkbox"/>	GIZ27-CCDLA-2	Gizmo CC/700mA Downlight Adjustable 2700K, Black	180lm, Vf=3V ,CRI 90, lens N, 1m cable
	<input type="checkbox"/>	GIZ27-CCDLA-3	Gizmo CC/700mA Downlight Adjustable 2700K, White	180lm, Vf=3V ,CRI 90, lens N, 1m cable
3000K	<input checked="" type="checkbox"/>	GIZ30-CCDLA-2	Gizmo CC/700mA Downlight Adjustable 3000K, Black	190lm, Vf=3V ,CRI 90, lens N, 1m cable
	<input type="checkbox"/>	GIZ30-CCDLA-3	Gizmo CC/700mA Downlight Adjustable 3000K, White	190lm, Vf=3V ,CRI 90, lens N, 1m cable
4000K	<input checked="" type="checkbox"/>	GIZ40-CCDLA-2	Gizmo CC/700mA Downlight Adjustable 4000K, Black	200lm, Vf=3V ,CRI 90, lens N, 1m cable
	<input type="checkbox"/>	GIZ40-CCDLA-3	Gizmo CC/700mA Downlight Adjustable 4000K, White	200lm, Vf=3V ,CRI 90, lens N, 1m cable