


gimmick

Gimmick has a minimal design and is well-suited for display case lighting

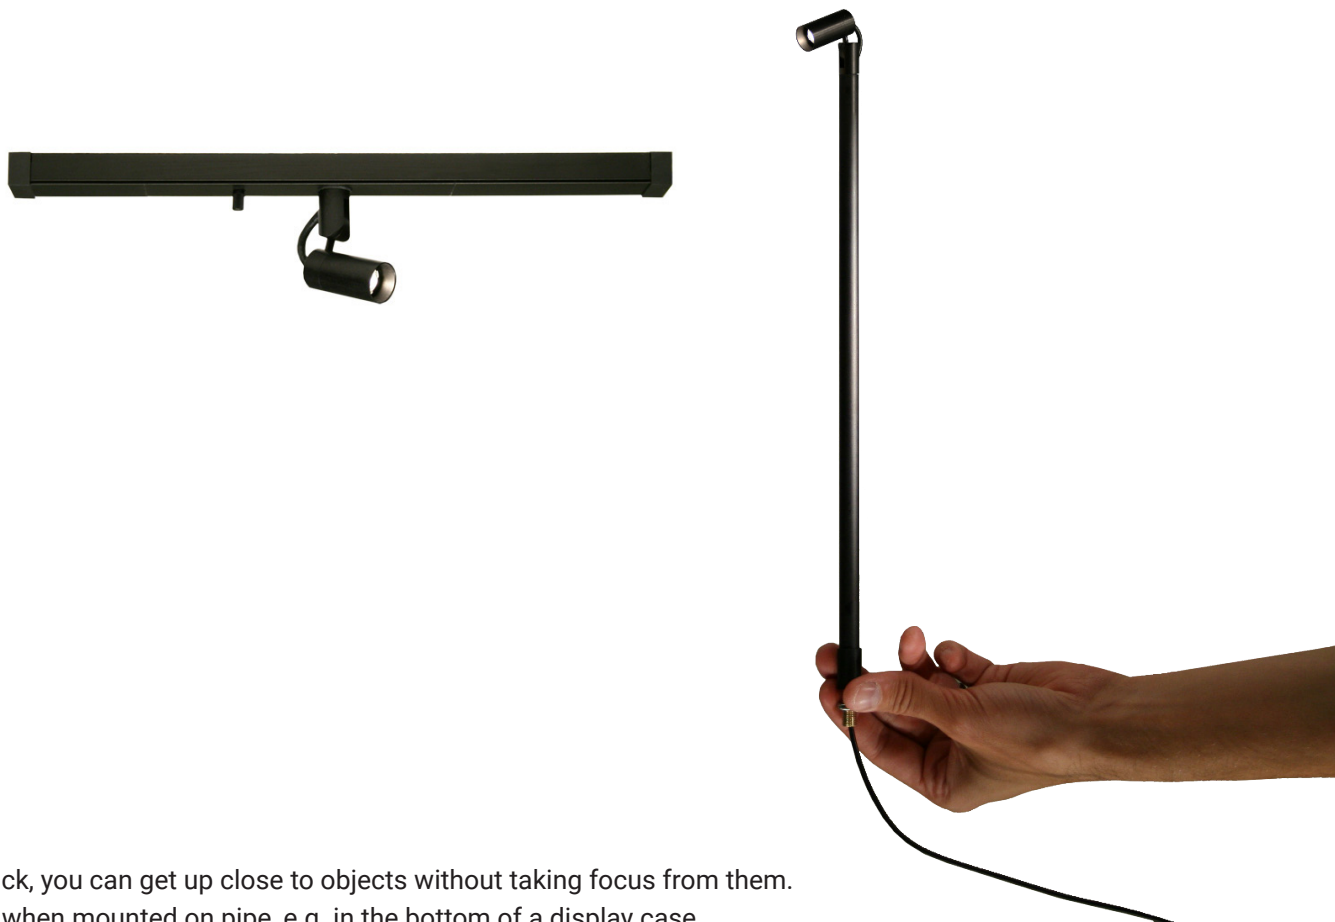

With Gimmick, you can get up close to objects without taking focus from them. Very subtle when mounted on pipe, e.g. in the bottom of a display case.

The benefits

- Extremely small and easy to use
- Can be mounted on a pipe

Choose the version that fits your needs.

	Pico Trac	LED Profile	Rod
Article	PT	CCL	CCR
Function	Integrated manual dimmer 0-100%	No local dimmer External dimming possible	Mounting on pipes
Compatibility	12V DC	350 mA	350 mA


Gimmick Specification

Material	Lamp housing made of aluminum Lens of made of polycarbonate
Finish	Grey (natural anodized) Black (anodized) Brass
System	Pico Trac LED profile Pipe mounting
Protection class	IP20
Operating	12V DC/CC
Power consumption	1W/2W
Beam angle	Interchangeable lenses
Color temperatures	2700K, 3000K, 4000K
Swivels	>365°
Tilts	>90°
Weight	30 g
Features	Toolless pan and tilt lock
Optional accessories	Snoot






Light Data

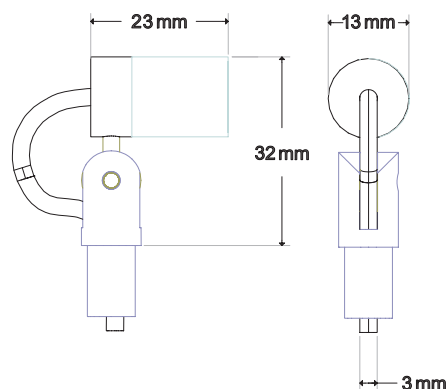LED Lumen	120 lm
Luminaire Lumen	60 lm
CRI	90
Red component R9	>60
MacAdam	3-step ellipse (SDCM 3)
TM30-18 Rf	93
TM30-18 Rg	103



Beam angles

Lens:	Narrow		Medium		Wide		Very Wide		
	16,9°		24,2°		29,7°		69,8°		
	[m]	∅	Lux	∅	Lux	∅	Lux	∅	Lux
	1	0,3	338	0,4	265	0,5	225	1,4	51
	2	0,6	85	0,9	66	1,1	56	2,8	13
	3	0,9	38	1,3	29	1,6	25	4,2	6

Light data from 3000K

SPOTLIGHTS GIMMICK



GIMMICK / PICO TRAC

Built-in local dimmer (0-100%)
Fits Pico Trac

2700K		GIM27-PT-1	Gimmick 12V DC/2W Pico Trac 2700K, Grey	CRI 90, lens W, dimmer
		GIM27-PT-2	Gimmick 12V DC/2W Pico Trac 2700K, Black	CRI 90, lens W, dimmer
3000K		GIM30-PT-1	Gimmick 12V DC/2W Pico Trac 3000K, Grey	CRI 90, lens W, dimmer
		GIM30-PT-2	Gimmick 12V DC/2W Pico Trac 3000K, Black	CRI 90, lens W, dimmer
4000K		GIM40-PT-1	Gimmick 12V DC/2W Pico Trac 4000K, Grey	CRI 90, lens W, dimmer
		GIM40-PT-2	Gimmick 12V DC/2W Pico Trac 4000K, Black	CRI 90, lens W, dimmer



GIMMICK / CCL

For LED Profile
Operated by external LED driver, max 350 mA / 2W, Vf = 3V


2700K		GIM27-CCL-1	Gimmick CC/350mA LED Profile 2700K, Grey	Vf=3V, CRI 90, lens W
		GIM27-CCL-2	Gimmick CC/350mA LED Profile 2700K, Black	Vf=3V, CRI 90, lens W
3000K		GIM30-CCL-1	Gimmick CC/350mA LED Profile 3000K, Grey	Vf=3V, CRI 90, lens W
		GIM30-CCL-2	Gimmick CC/350mA LED Profile 3000K, Black	Vf=3V, CRI 90, lens W
4000K		GIM40-CCL-1	Gimmick CC/350mA LED Profile 4000K, Grey	Vf=3V, CRI 90, lens W
		GIM40-CCL-2	Gimmick CC/350mA LED Profile 4000K, Black	Vf=3V, CRI 90, lens W



GIMMICK / ROD







Installation on 10mm pipes
Operated by external LED driver, max 350 mA / 1W, Vf = 3V
To get a complete unit, you need 1 fixture, 1 foot, 1 rod.

2700K		GIM27-CCR-1	Gimmick CC/350mA Rod 2700K, Grey	Vf=3V, CRI 90, lens W, 1.5m cable
		GIM27-CCR-2	Gimmick CC/350mA Rod 2700K, Black	Vf=3V, CRI 90, lens W, 1.5m cable
		GIM27-CCR-4	Gimmick CC/350mA Rod 2700K, Brass	Vf=3V, CRI 90, lens W, 1.5m cable
3000K		GIM30-CCR-1	Gimmick CC/350mA Rod 3000K, Grey	Vf=3V, CRI 90, lens W, 1.5m cable
		GIM30-CCR-2	Gimmick CC/350mA Rod 3000K, Black	Vf=3V, CRI 90, lens W, 1.5m cable
		GIM30-CCR-4	Gimmick CC/350mA Rod 3000K, Brass	Vf=3V, CRI 90, lens W, 1.5m cable
4000K		GIM40-CCR-1	Gimmick CC/350mA Rod 4000K, Grey	Vf=3V, CRI 90, lens W, 1.5m cable
		GIM40-CCR-2	Gimmick CC/350mA Rod 4000K, Black	Vf=3V, CRI 90, lens W, 1.5m cable
		GIM40-CCR-4	Gimmick CC/350mA Rod 4000K, Brass	Vf=3V, CRI 90, lens W, 1.5m cable



GIMMICK ROD ACCESSORIES

Rod is delivered in pre-cut lengths up to 650 mm

	GIM-RM-1	Rod 50-650mm, Grey	Ø10mm rod
	GIM-RM-2	Rod 50-650mm, Black	Ø10mm rod
	GIM-RM-4	Rod 50-650mm, Brass	Ø10mm rod
	GIM-RF-1	Mounting foot, Grey	For 10mm rod, M8
	GIM-RF-2	Mounting foot, Black	For 10mm rod, M8
	GIM-RF-4	Mounting foot, Brass	For 10mm rod, M8



GIMMICK LENSES

Lenses for Gimmick

<input type="checkbox"/>	GIZ-L-N	Gizmo Lens Narrow
<input type="checkbox"/>	GIZ-L-M	Gizmo Lens Medium
<input type="checkbox"/>	GIZ-L-W	Gizmo Lens Wide
<input type="checkbox"/>	GIZ-L-VW	Gizmo Lens Very Wide
<input type="checkbox"/>	GIZ-L-E	Gizmo Lens Elliptical

GIMMICK SNOOTS

Extended glare protection for Gimmick
Length is 26 mm

	GIM-B26-1	Gimmick Snoot, Grey
	GIM-B26-2	Gimmick Snoot, Black